

# Metis 3

Commercial Lighting / Troffer



DAVIS LIGHTING

## Features

- Universal mounting
- White powder coated steel body
- High-grade matt anodised aluminium ULB louvres
- Hinged louvre frame for easy access
- Energy efficient Osram PrevaLED driver
- Cutoff 550 (C0) and 630 (C90)
- Low profile 60mm depth

## Applications

- Offices
- Studios
- Retail outlets
- Food courts, canteens
- Medical centres

## Options

- Plaster frame


## Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS 60598.2.2
- IEC/AS/NZS CISPR 15

## Mounting Methods



Surface mounted

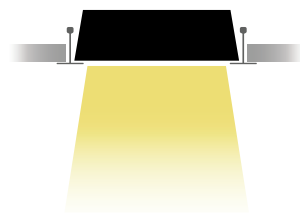

T-bar recessed



*Designed for Universal Mounting in nominal 1200 x 300 T-Grid or Surface applications. Plaster trim available as a separate option.*






## Specifications

Model	ME3U2120RBL4K	ME3U4135RBL4K
Nominal Power (W)	17	35
Input Voltage	220 - 240 VAC 50 / 60 Hz	
Luminous Flux (lm)	2028	3988
Efficacy (lm/W)	119	119
CRI	≥ 80	
Power Factor	> 0.90	
Colour Temp. (K)	4000	
Rated Life L70B50 (hr)	> 50,000	
Weight (kg)	2.45	4.70


## Lighting Data

ME3U2120RBL4K / ME3U4135RBL4K

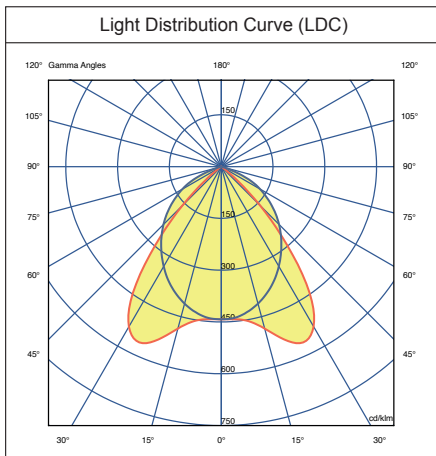


## Dimensions


ME3U2



590



ME3U4

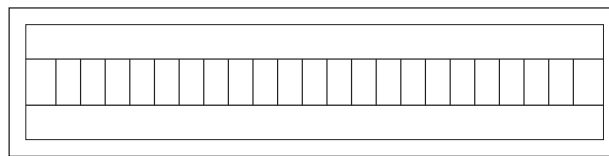

1190

