

Wyplash - WPU

Exterior Lighting / Weatherproof



DAVIS LIGHTING

Features

- Energy efficient weatherproof with IP66 protection
- Fire-rated UV stabilized polycarbonate body and opalised diffuser
- Cable entry gland one end
- White powder coated zinc steel gear tray with PC fixing clips
- Stainless steel cover clips
- Stainless steel mounting brackets
- Suitable for surface or pendant mounting
- Fitting for T5 & T8 LED lamp available (Clear diffuser)
- Maintenance free

Applications

- Plant rooms
- Service stations
- Factories
- Warehouses
- Car parks
- Security areas

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

Mounting Methods



Surface mounted



Suspension



Fitting for T5 & T8 LED lamp



Wyplash - WPU

Exterior Lighting / Weatherproof



DAVIS LIGHTING

Product Code Key (Linear LED Module)

Model	Type of fitting	Nominal Length	Power	LED System	Colour Temp.
WPU	S = Single	2 = 600 mm	10 = 10W	RBL = Osram	3K = 3000K
	T = Twin	4 = 1200 mm	20 = 20W		4K = 4000K
					35 = 35W

e.g. WPUS210RBL4K = WPU single series 600mm length with 10W 4000K Osram system

Specifications (Linear LED Module)

Model	WPUS210 RBLxK	WPUS220 RBLxK	WPUS420 RBLxK	WPUS435 RBLxK	WPUT210 RBLxK	WPUT220 RBLxK	WPUT420 RBLxK	WPUT435 RBLxK
Nominal Power (W)	10	20	20	35	10	20	20	35
Input Voltage	220 - 240 VAC 50 / 60 Hz							
Luminous Flux (lm)	1237	2127	2620	4377	1205	2073	2513	4414
Efficacy (lm/W)	125	125	133	126	121	121	128	126
Colour Temp.	3000 / 4000 / 6500							
(K) CRI	> 80							
Power Factor	> 0.95							
SDCM	≤ 3							
Beam Angle (°)	100							
Colour Temp. (K)	3000 / 4000 / 6500							
Luminaire Rated Life (hr)	50,000							
Ambient Temp. (°C)	35							
Weight (kg)	1.2	1.2	1.8	1.8	1.4	1.4	2.4	2.4

"x" denotes CCT, 3 = 3000K ; 4 = 4000K ; 6 = 6500K

Product Code Key (T8 & T5 -Without LED lamp)

Model	Type of fitting	Nominal Length	No. of Lamp	Type of Lamp
WPU	S = Single	2 = 600 mm	1 = 1 lamp	T8A = T8 AC
	T = Twin	4 = 1200 mm	2 = 2 lamp	T5A = T5 AC

e.g. WPUS21T8A = WPU single fitting 600mm length for 1 LED lamp of T8 AC

Specifications (T8 & T5 -Without LED lamp)

T8 AC

Model	WPUS21T8A	WPUS41T8A	WPUT21T8A	WPUT41T8A	WPUT22T8A	WPUT42T8A
Type of fitting	Single	Single	Single	Single	Twin	Twin
Nominal Length (mm)	600	1200	600	1200	600	1200
No. of Lamp (pc)	1	1	1	1	2	2

T5 AC

Model	WPUS21T5A	WPUS41T5A	WPUT21T5A	WPUT41T5A	WPUT22T5A	WPUT42T5A
Type of fitting	Single	Single	Twin	Twin	Twin	Twin
Nominal Length (mm)	600	1200	600	1200	600	1200
No. of Lamp (pc)	1	1	1	1	2	2

Wyplash - WPU


Exterior Lighting / Weatherproof




DAVIS LIGHTING

Lighting Data


WPUS220RBL4K




WPUT220RBL4K



WPUS435RBL4K







WPUT435RBL4K



Dimensions

WPUS

WPUT

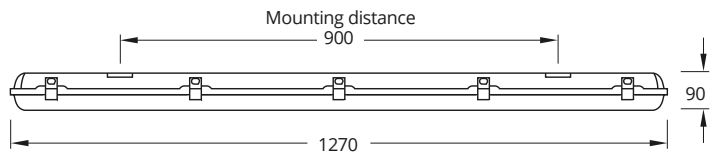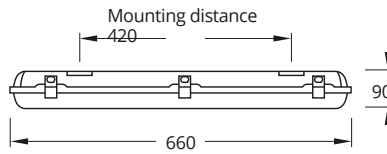

davislighting.com



davislighting.com.au

All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

WPU 220929