



# GLINOS GSC G2

**High power factor, lightweight, and versatile mounting options for efficient and adaptable lighting solutions.**

# GLINOS GSC G2

High / Low Bay



## Features

- Aluminium / steel construction
- Low energy consumption
- Long life LEDs
- High power factor
- Light weight
- Numerous mounting options
- IP65 rated


## Applications

- Commercial
- Industrial

## Standards

- IEC 60598-2-5
- IEC/AS/NZS 60598.1
- IEC/AS/NZS CISPR 15

## Mounting Methods



# GLINOS GSC G2

High / Low Bay



## Product Code Key

Model	Power	- CRI & CCT	Beam Angle
GSC	75 =75w	R83 =CRI>80, 3000K	B60 =60°
	100 =100w	R84 =CRI>80, 4000K	B90 =90°
	120 =120w	R85 =CRI>80, 6500K	B120 120°
	150 =150w		
	200 =200w		

eg: **GSC150-R84B120** = GSC 150w, CRI>80, CCT 4000K, Beam angle 120°

## Specifications

GLINOS GSC G2	GSC75-xy	GSC100-xy	GSC120-xy	GSC150-xy
Nominal Power (W)	75	100	120	150
Input Voltage	220-240			
Frequency	50/60			
Luminous Flux (lm)	9750-10500	13000-14000	15600-16800	19500-21000
Efficacy (lm/W)	130-140			
CRI	≥80			
Power Factor	≥0.9			
SDCM	≤5			
CCT	3000/400/500			
Product Lifetime (L70B50)	>50000			
Operating Temp. (°C)	-30 to 45			
Weight (kg)				
IP Rating	IP66			
Product Carton qty per box	1			
Product Carton Dimension	385 x 385 x 115	386 x 385 x 115	471 x 470 x 150	472 x 470 x 150
Product Carton Weight	3.9	4	6.2	6.4

'x' denotes CRI & CCT  
'y' denotes beam angle


# GLINOS GSC G2

High / Low Bay




## Lighting Distribution


GSC-R84B60

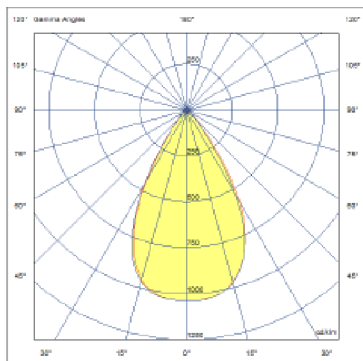

GSC-R84B90

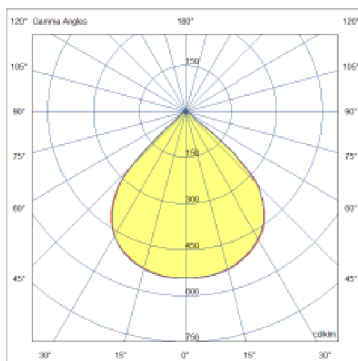


GSC-R84B120

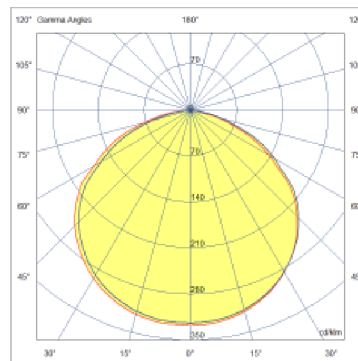


## Dimensions


GSC120, 150, 200

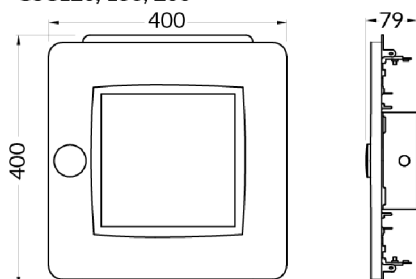


GSC75, 100

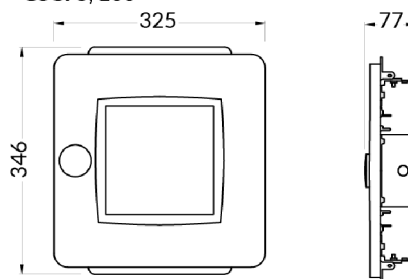

GSC915 CTP/ GSC1220 CTP

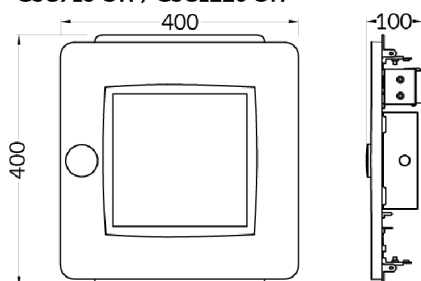

GSC610 CTP

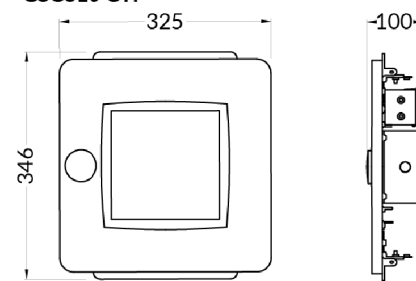

## High / Low Bay



Part Number: SW-R0208-00



Part Number: SW-R0210-00



Part Number: SW-R0220-00



Part Number: CL-T0281-00



Part Number: GSCSBS



Part Number: GSCSBL



All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Generated on: 07-03-2025. Please contact the nearest Davis Lighting Sales Office or check our website for the latest product specifications.