

Lenhof G3

Industrial Lighting / High Bay



Features

- Instantaneous start up (no flickering or humming)
- Low profile with 70mm height
- Clear or K12 prismatic diffuser
- Finished in a white durable polyester-epoxy powder-coating
- Energy saving & high-performance LED light source
- Low maintenance costs

Applications

- Machine shops / Industrial work places
- Warehouses / Stores
- Distribution centres / Big box operations
- Indoor sports venues
- Loading docks

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

Mounting Methods



Pendant



Lenhof G3

Industrial Lighting / High Bay



Product Code Key

Model	Nominal Length	Power	Generation	-	CRI & Colour Temp.	Diffuser
LHB	4 = 1200mm	100 = 100W 150 = 150W	G3		R83 = CRI>80, 3000K R84 = CRI>80, 4000K R86 = CRI>80, 6000K	K01 = Clear K06 = Prismatic K12

e.g. LHB4100G3-R84K01 = LHB G3 series, 100W, CRI >80, 4000K. Clear diffuser


Specifications

Model	LHB4100G3-xK01	LHB4100G3-xK06	LHB4150G3-xK01	LHB4150G3-xK06
Diffuser	Clear	Prismatic K12	Clear	Prismatic K12
Nominal Power (W)	100		150	
Input Voltage	200 - 240 VAC 50 / 60 Hz			
Luminous Flux (lm)	14,100	12,770	19,530	17,460
Luminaire Efficacy (lm/W)	141	128	130	116
CRI	> 80			
Power Factor	> 0.95			
Colour Temp. (K)	3000 / 4000 / 6000			
Luminaire Rated Life (hrs)	> 50,000			
Operating Temp. (°C)	-20 to +35			
Weight (kg)	4.5		4.5	


"x" denotes CRI & CCT, R83 = CRI>80, 3000K ; R84 = CRI>80, 4000K ; R86 = CRI>80, 6000K

Lighting Data


LHB4150G3-R84K01

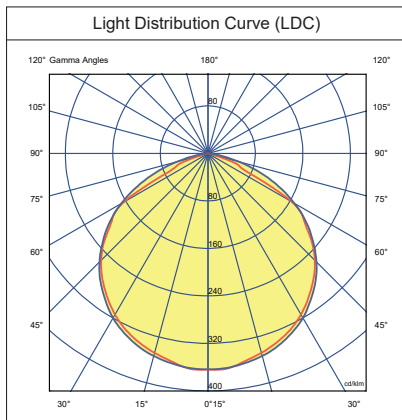

LHB4150G3-R84K06

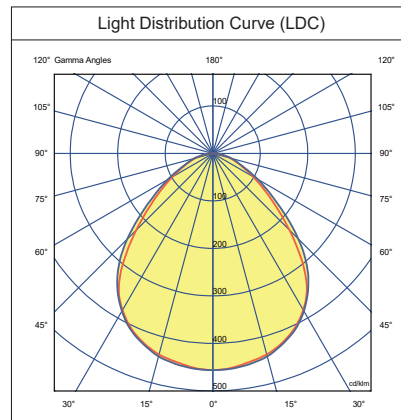

Dimensions

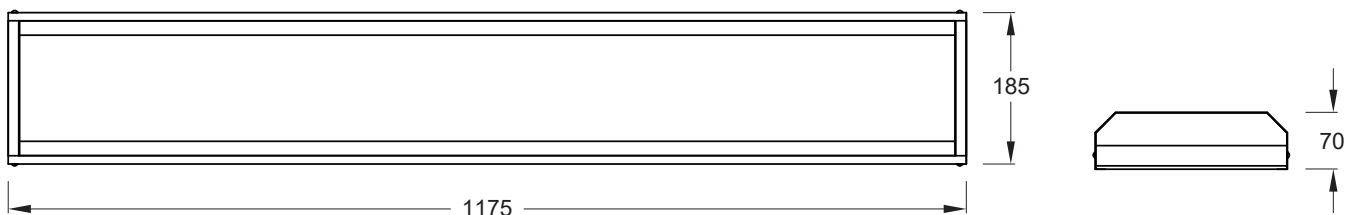

davislighting.com



davislighting.com.au

All photometric and electrical data published are of ±10% tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.