

WYPLASH WPUT

Exterior Lighting / Weatherproof



Features

Wide body IP65 rated Weatherproof Batten
Robust IK08 rated polycarbonate body and opal diffuser
Easy release stainless steel clip system
Available in 2ft and 4ft
50,000hrs (@L70) rated system
SELV compliant
Suitable for surface or pendant mount
Flicker-free operation



Applications

Outdoor
Industrial
Car parks
Corridors and Stairwells
Public Amenities
Factories & warehouses


Options

Dali Dimming
Sensor with corridor function
Emergency

Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS CISPR 15

Mounting Methods

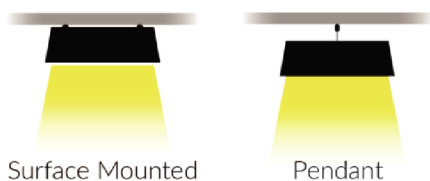

SELV

WYPLASH WPUT

Exterior Lighting / Weatherproof



Specifications

Model	WPUT220-R85	WPUT420-R85	WPUT435-R85
Body Colour	Grey		
Nominal Power (W)	18	18	35
Input Voltage (V)	220-240		
Frequency (Hz)	50/60		
Luminaire Flux (lm)	2160	2160	4200
Luminaire Efficacy (lm/W)	120		
CRI (Ra)	>80		
Power Factor	>0.9		
CCT (K)	5000		
Beam Angle (°)	120		
Luminaire Rated Life (hr)	>50000 @ L70		
Operating Temp. (°C)	-20 to 35		
Weight (kg)	1.2	1.2	2.2

Product Code Key

Model	Nominal Length	Power (min-max)	CRI & Colour Temp.	- Dimming	Emergency	Sensor	Emergency & Sensor
WPUT	2 = 600mm 4 = 1200mm	20 = 18W 35 = 35W	R85 = CRI>80, 5000K R84 = CRI>80, 4000K	D14 = Dali	E01 = Maintained with 3hours Emergency + LiFePO4 + test switch	S25 = Microwave sensor Motion, Daylight, Dimming, ON/OFF	E1S25 = Maintained + Microwave sensor Motion, Daylight, Dimming, ON/OFF

e.g. WPUT 600mm long, 20w, CRI>80, CCT5000K, Maintained emergency + sensor

Refer to accessories section for sensor remote

Default Sensor Setting

Detection range : 6M
Hold time : 3 minutes
Standby period : 0
Standby dim level 30%
Daylight : OFF

*Sensor setting set using remote to enable easy configuration/reconfiguration of sensor setting.


WYPLASH WPUT

Exterior Lighting / Weatherproof




Lighting Data

WPUT220-R85

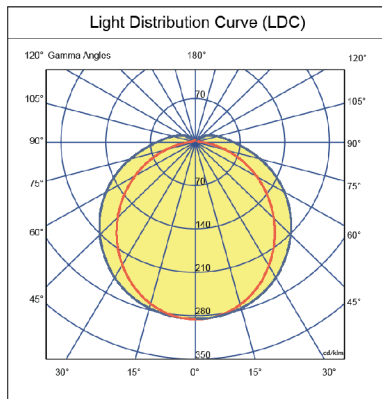


WPUT435-R85

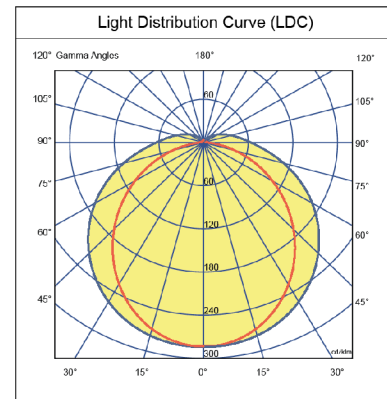


Dimensions

WPUT220



WPUT420 / WPUT435



Accessories

A remote control is required to configure/reconfigure WPUT sensor setting.


One remote control is required per project.

Each remote can program multiple sensors.

Two IR-based handheld remote control models are available.



SW-R0208-00
(basic function)

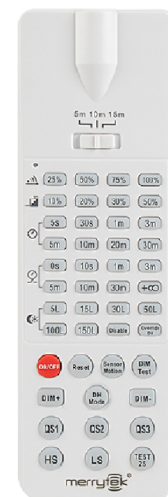

SW-R0210-00
(advance functions)



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.