

### Features

- Circular profile
- Surface mount
- Eco-friendly LED product for energy saving
- CRI  $\geq 80$  and good stability over lifetime
- Quick and easy installation


### Applications

- Offices
- Hotels
- Retail shops
- Residential

### Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

### Mounting Methods



Surface mounted




### Specifications

| Model                    | DM505WxK                 | DM710WxK | DM915WxK | DM920WxK |
|--------------------------|--------------------------|----------|----------|----------|
| Nominal Power (W)        | 6                        | 10       | 15       | 20       |
| Input Voltage            | 220 - 240 VAC 50 / 60 Hz |          |          |          |
| Luminous Flux (lm)       | 460                      | 900      | 1330     | 1640     |
| Efficacy (lm/W)          | 77                       | 90       | 89       | 82       |
| CRI                      | ≥ 80                     |          |          |          |
| Power Factor             | > 0.90                   |          |          |          |
| Colour Temp. (K)         | 3000 / 4000 / 5700K      |          |          |          |
| Beam Angle (°)           | 110                      |          |          |          |
| LED Life L70B50 (hr)     | > 30,000                 |          |          |          |
| Ambient Temp. $t_a$ (°C) | 35                       |          |          |          |
| Weight (kg)              | 0.10                     | 0.20     | 0.30     | 0.30     |


"x" denotes CCT, 3 = 3000K ; 4 = 4000K ; 6 = 5700K

### Lighting Data


DM710W4K

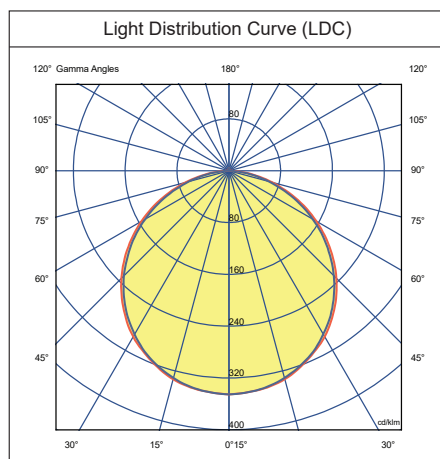

DM920W4K

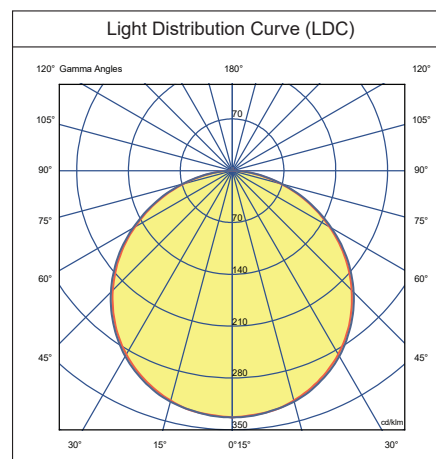

### Dimensions

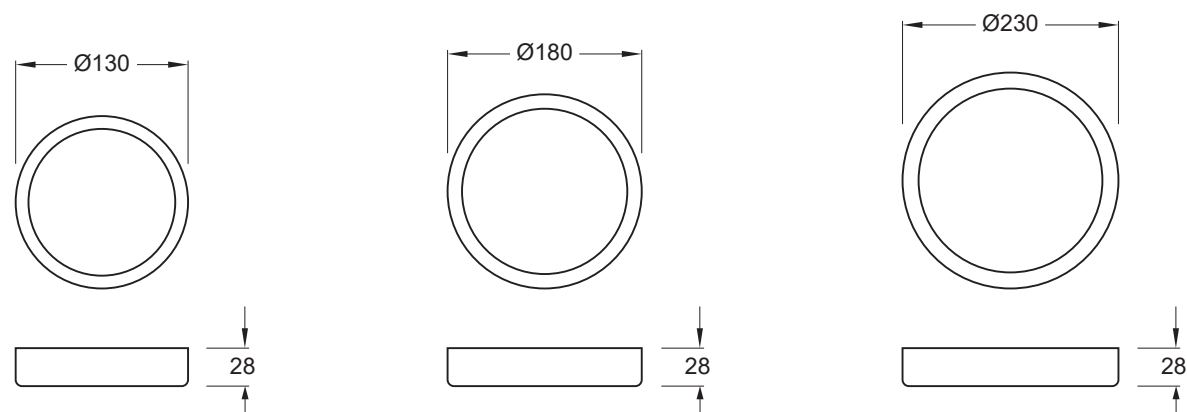

DM505WxK

DM710WxK

DM915WxK  
DM920WxK

