

WARELL WLS

Exterior Lighting / Surface Wall Light

Features

Surface wall light available in round, square and rectangular shape
Indirect system to deliver low glare lighting
Range of size and output options
Aluminum housing provides a great thermal management
IP65 & IK08 protection for outdoor application
Loop in and out wire design

Applications

Residential complex surrounds
Commercial exteriors
Carparks
Walkways
Building entrance
Motels, hotels

Standards

Manufactured under ISO 9001:2015 to standards
IES/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS CISPR 15


Mounting






Dimensions


WLS5R

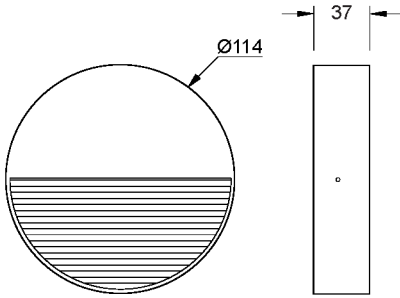


WLS5S

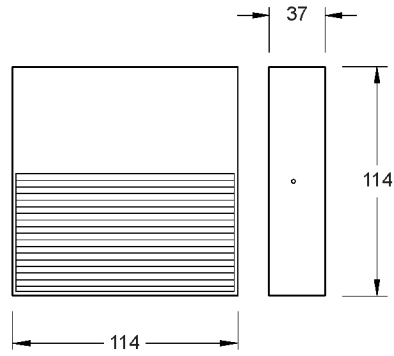


WLS8R

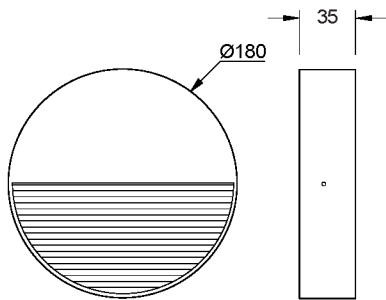


WLS8S

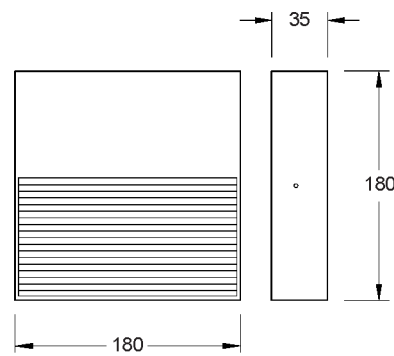

WLS5E

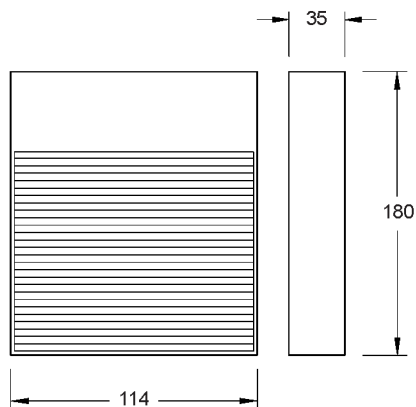

WLS10E

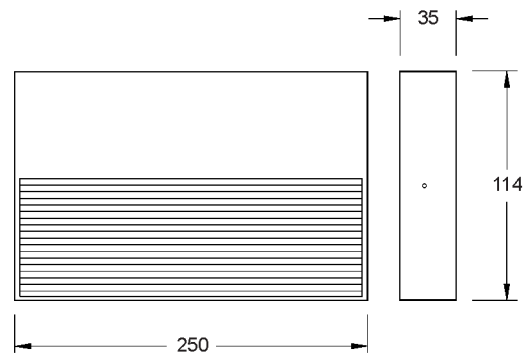

All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.