

Phoebe

Commercial Lighting / Batten



Features

- Enhanced performance
- White powder coated mild steel body
- Opalised polycarbonate diffuser
- Long life 50,000 hrs LED
- Quick and easy installation
- Suitable for surface or pendant mount


Applications

- Retail shops
- Storage areas
- Kitchens, canteens
- Public amenities
- Corridor and entrance areas
- Covered car parks, workshops


Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS CISPR 15

Mounting Methods

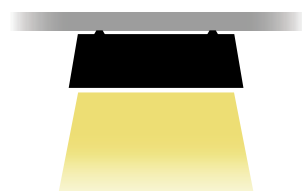

Surface mounted

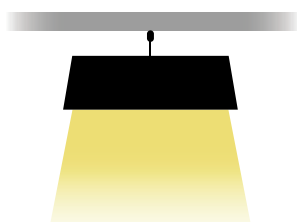

Pendant




Specifications

Model	PBD210 RBLxK	PBD220 RBLxK	PBD420 RBLxK	PBD435 RBLxK	PBW210 RBLxK	PBW220 RBLxK	PBW420 RBLxK	PBW435 RBLxK
Format	Diffused				Wired Guard			
Nominal Power (W)	10	20	25	35	10	20	20	35
Input Voltage	220 - 240 VAC 50 / 60 Hz							
Luminous Flux (lm)	1255	1760	2545	3550	1260	1780	2530	3570
Efficacy (lm/W)	126	88	85	100	126	89	127	102
CRI	> 80							
Power Factor	≥ 0.95							
Colour Temp. (K)	3000 / 4000 / 6500K							
LED Life L70B50 (hr)	> 50,000							
Ambient Temp. t_a (°C)	35							
Weight (kg)	1.38	1.38	2.30	2.30	1.38	1.38	2.30	2.30


"x" denotes CCT, 3 = 3000K ; 4 = 4000K ; 6 = 6500K

Lighting Data

PBD435RBL4K


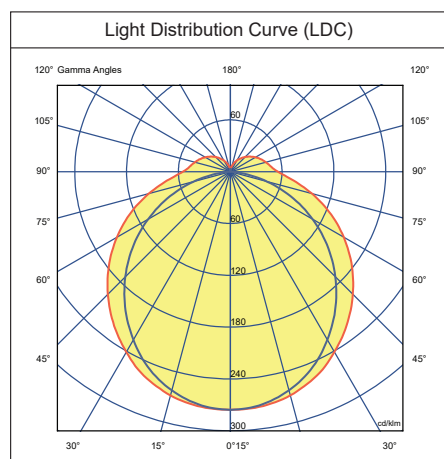


PBW435RBL4K


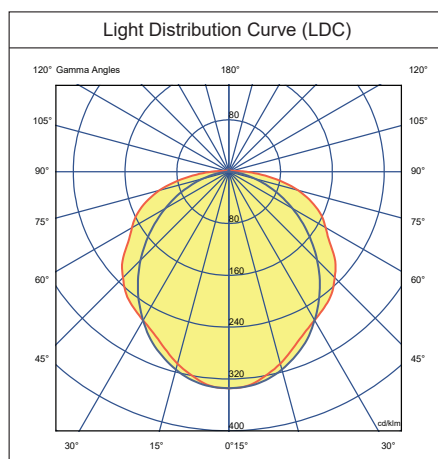


Dimensions

PBD

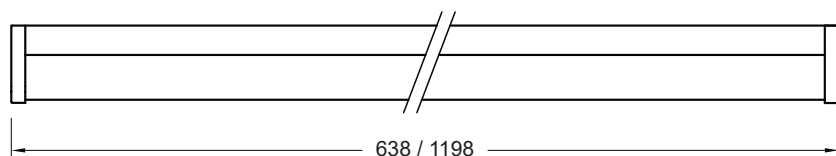

PBW

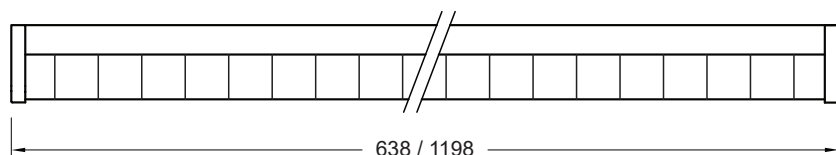

davislighting.com



davislighting.com.au

Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

PB25FEB25