

CCT PRE - SET LED DOWNLIGHT

Installation Instructions

Thanks you for purchasing this quality LED product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

SPECIFICATIONS

MODEL	POWER	DIMENSION	VOLTAGE	ССТ	Cut-out	BEAM ANGLE	DIMMABLE
DLC415WCTD	15W	Ø 145xH45.5mm	AC200-240V 50/60Hz	3000K-4000K-5000K	Ø 120-130mm	90°	YES
DLC620WCTD	20W	Ø 189.5xH44.5mm	AC200-240V 50/60Hz	3000K-4000K-5000K	Ø 160-170mm	120°	YES
DLC828WCTD	28W	Ø 228xH45.5mm	AC200-240V 50/60Hz	3000K-4000K-5000K	Ø 200-210mm	120°	YES




IMPORTANT

- * It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations and local building control.
- X These products are designed for connection to 200V-240V[∼] main supply. Switch off the mains supply before installation or servicing.
- X This product indoor use only.
- 💥 Davis Lighting will not be responsible if this fixture is not installed according to local safety standards or damage resulting from incorrect use.
- X This product is suitable for direct mounting on normally flammable surfaces.
- 💥 Dust off the device and if necessary use a soft sponge.
- * The light source of this luminaire is not replaceable: when the light source reaches its end of life, the whole of the luminaire shall be replaced.

WARNING

- * Ensure that the main electrical supply is switched off before installing the fixture;
- * If cable is defective, do not use;
- * If in doubt consult a qualified electrician;
- * Never use alcohol or dissolvents to cleaning. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

INSTALLATIONS

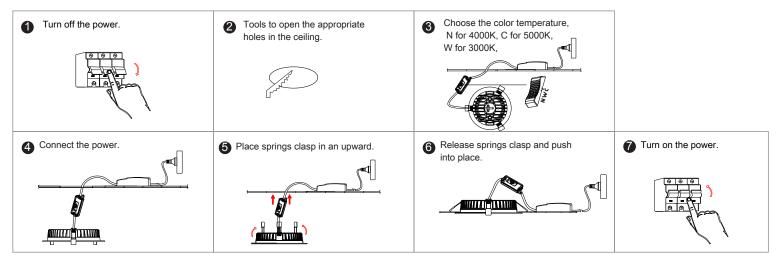

WARRANTY

This LED products is subject to our standard warranty. Any modifications to this product or installing NOT according to the installation instructions above will void the warranty