

Calypso CYS

Exterior Lighting / Bulkhead IP65



Features

Sqaure shape design with various trim choices
Vandal resistant suitable for outdoor use
Reliable thermal management for long life and lumen maintenance.
Robust die-casted aluminium body with PC diffser

Applications

LED diffused bulkhead is designed to use for commercial building, warehouse, corridor, pathway, garages and etc.

Standards

EN55015	Radio disturbance emissions
EN61000-3-2	Limited for harmonic emissions
EN61347-1-2-13	LED Modules for general & safety
EN61547	Immunity requirements
EN62471	Photobiological safety of lamps and systems

Specification

Housing	Die-cast aluminium casing Epoxy powder coating
Optic	PC diffuser
Input Voltage	220-240Vac
Frequency	50/60Hz
Power factor	>0.9
Typ. CRI (Ra)	>80
SDCM	>6 step MacAdam
IP Rating	IP65
Rated Life Span	>50,000hrs
Driver option	ON/OFF, Trailing-edge, 1-10v, DALI



Mounting



Surface



Wall




Calypso CYS

Exterior Lighting / Bulkhead IP65



Dimensions

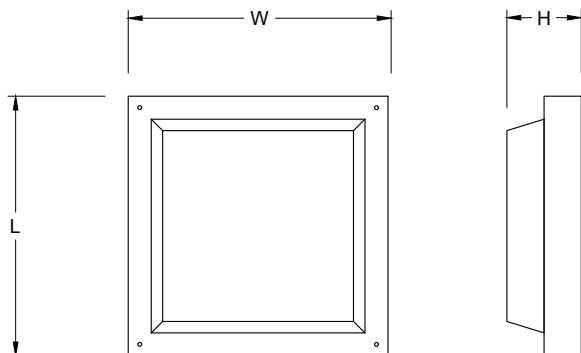

Model	Nominal Power (W)	LED Lumen (lm)	Colour Temp. (K)	Beam Angle (°)	Dimension LxWxH (mm)	Casing Colour
CYS20	20	1800	3000/4000	120	270x270x85	Black/Grey
CYS20W	20	1800	3000/4000	120	270x270x85	Black/Grey
CYS20H	20	1800	3000/4000	120	270x270x85	Black/Grey

Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

www.davislighting.com

Opti Pro Sdn Bhd (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ optipro.sdn.bhd@gmail.com ☎ +60-11-8888 3045