

# Calypso CYR

Exterior Lighting / Bulkhead IP65



## Features

Round shape design with various trim choices  
Vandal resistant suitable for outdoor use  
Reliable thermal management for long life and lumen maintenance.  
Robust die-casted aluminium body with PC diffuser

## Applications

LED diffused bulkhead is designed to use for commercial building, warehouse, corridor, pathway, garages and etc.

## Standards

EN55015	Radio disturbance emissions
EN61000-3-2	Limited for harmonic emissions
EN61347-1-2-13	LED Modules for general & safety
EN61547	Immunity requirements
EN62471	Photobiological safety of lamps and systems

## Specification

Housing	Die-cast aluminium casing Epoxy powder coating
Optic	PC diffuser
Input Voltage	220-240Vac
Frequency	50/60Hz
Power factor	>0.9
Typ. CRI (Ra)	>80
SDCM	≤6 step MacAdam
IP Rating	IP65
Rated Life Span	>50,000hrs
Driver option	ON/OFF, Trailing-edge, 1-10v, DALI



## Mounting



Surface



Wall




# Calypso CYR

Exterior Lighting / Bulkhead IP65



## Dimensions

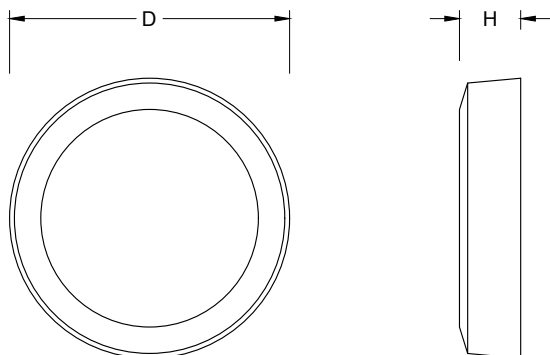

Model	Nominal Power (W)	LED Lumen (lm)	Colour Temp. (K)	Beam Angle (°)	Dimension DxH (mm)	Casing Colour
CYR05	5	500	3000/4000/6000	120	145x85	Black/Grey/White
CYR05H	5	500	3000/4000/6000	120	145x85	Black/Grey/White
CYR05W	5	500	3000/4000/6000	120	145x85	Black/Grey/White
CYR20	20	1800	3000/4000/6000	120	220x70	Black/Grey/White
CYR20H	20	1800	3000/4000/6000	120	220x70	Black/Grey/White
CYR20W	20	1800	3000/4000/6000	120	220x70	Black/Grey/White
CYR20L	20	1800	3000/4000/6000	120	275x85	Black/Grey/White
CYR20LH	20	1800	3000/4000/6000	120	275x85	Black/Grey/White
CYR20LW	20	1800	3000/4000/6000	120	275x85	Black/Grey/White

Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.



All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

[www.davislighting.com](http://www.davislighting.com)

**Opti Pro Sdn Bhd** (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,  
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ [optipro.sdn.bhd@gmail.com](mailto:optipro.sdn.bhd@gmail.com) ☎ +60-11-8888 3045