

Sigma SMP

Exterior Lighting / Bulkhead IP65



Features

Oval and round shape available
Vandal resistant for indoor and outdoor use
Reliable thermal management for long life and lumen maintenance.
LED vision feature incorporated LED module

Applications

LED Oval Bulkhead is designed to use for commercial building, warehouse, corridor, pathway, garages and etc.

Standards

EN55015	Radio disturbance emissions
EN61000-3-2	Limited for harmonic emissions
EN61347-1-2-13	LED Modules for general & safety
EN61547	Immunity requirements
EN62471	Photobiological safety of lamps and systems



Specification

Housing	ABS
Optic	PC diffuser
Input Voltage	220-240Vac
Frequency	50/60Hz
Power factor	>0.9
Typ. CRI (Ra)	>80
SDCM	≤6 step MacAdam
IP Rating	IP65
IK Rating	IK08
Rated Life Span	>30,000hrs
Driver option	ON/OFF

Mounting



Surface




Sigma SMP

Exterior Lighting / Bulkhead IP65



Dimensions

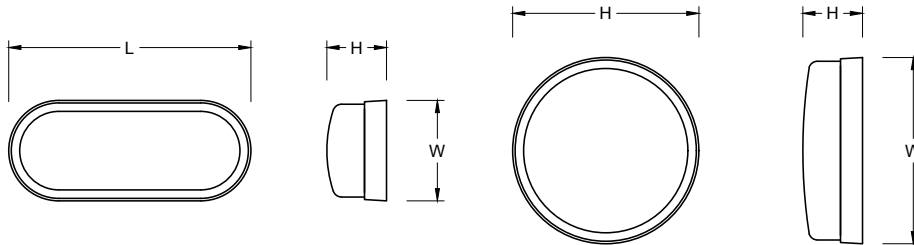

Model	Nominal Power (W)	LED Lumen (lm)	Colour Temp. (K)	Beam Angle (°)	Dimension LxWxH (mm)	Casing Colour
SMP15V	15	1275	3000/4000/6000	140	215x115x65	White/Black
SMP20V	20	1700	3000/4000/6000	140	215x145x65	White/Black
SMP15R	15	1275	3000/4000/6000	140	165x65	White/Black
SMP20R	20	1700	3000/4000/6000	140	220x65	White/Black

V=Oval shape, R=Round shape

Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

www.davislighting.com

Opti Pro Sdn Bhd (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ optipro.sdn.bhd@gmail.com ☎ +60-11-8888 3045