

# ORKI 5 Series

## Recess Anti Glare LED Downlight



### Features

Eco-friendly LED product for energy saving and visual consistency.  
Modular design for easy maintenance with future proofing.  
Propriety lens design for high LOR.  
Reliable thermal management for long life and lumen maintenance.

### Applications

Recess Anti Glare LED Downlight is designed to use for commercial buildings, shopping malls, residential and etc.

### Standards


EN55015	Radio disturbance emissions
EN61000-3-2	Limited for harmonic emissions
EN61347-1-2-13	LED Modules for general & safety
EN61547	Immunity requirements
EN62471	Photobiological safety of lamps and systems



### Specification

Housing	Die-cast aluminium, white frame, adjustable angle 30°, rotational 355°, stainless steel clips
Light distribution	Narrow, medium beams
Optics	PMMA Lens
Input Voltage	220-240Vac
Frequency	50/60Hz
Power factor	>0.9
Typ. CRI (Ra)	>80, >90(optional)
SDCM	≤3 step MacAdam
IP Rating	IP20
Rated Life Span	>50,000hrs
Driver option	ON/OFF, Trailing-edge, 1-10v, DALI

### Mounting



Recess




# ORKI 5 Series

Recess Anti Glare LED Downlight



## Dimensions

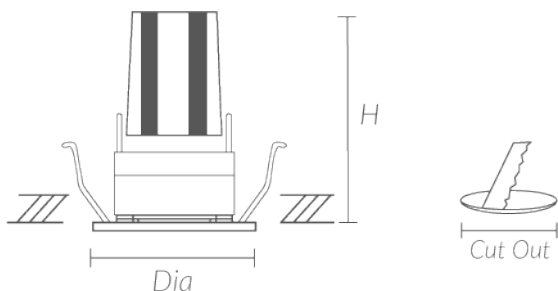

Model	Nominal Power (W)	LED Lumen (lm)	Colour Temp. (K)	Beam Angle (°)	Dimension Dia x H (mm)	Cut Out (mm)
OK5R634	34	4880/5025/5075	3000/4000/5700	15/24/36/60	140x155	125
OK5R641	41	5485/5645/5700	3000/4000/5700	15/24/36/60	140x155	125
OK5R746	46	6030/6210/6270	3000/4000/5700	15/24/36/60	166x175	150
OK5R753	53	7120/7335/7405	3000/4000/5700	15/24/36/60	166x175	150
OK5R760	60	7930/8165/8245	3000/4000/5700	15/24/36/60	166x175	150

Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.



All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as guarantee of individual product performance.

[www.davislighting.com](http://www.davislighting.com)

Opti Pro Sdn Bhd (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,  
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ [optipro.sdn.bhd@gmail.com](mailto:optipro.sdn.bhd@gmail.com) ☎ +60-11-8888 3045

# ORKI 5 Series

## Recess Anti Glare LED Downlight



### Features

Eco-friendly LED product for energy saving and visual consistency.  
Modular design for easy maintenance with future proofing.  
Propriety lens design for high LOR.  
Reliable thermal management for long life and lumen maintenance.

### Applications

Recess Anti Glare LED Downlight is designed to use for commercial buildings, shopping malls, residential and etc.

### Standards


EN55015	Radio disturbance emissions
EN61000-3-2	Limited for harmonic emissions
EN61347-1-2-13	LED Modules for general & safety
EN61547	Immunity requirements
EN62471	Photobiological safety of lamps and systems



### Specification

Housing	Die-cast aluminium, white frame, adjustable angle 30°, rotational 355°, stainless steel clips
Light distribution	Narrow, medium beams
Optics	PMMA Lens
Reflector	Silver, Dark Chrome, Black, White
Input Voltage	220-240Vac
Frequency	50/60Hz
Power factor	>0.9
Typ. CRI (Ra)	>80, >90(optional)
SDCM	≤3 step MacAdam
IP Rating	IP20
Rated Life Span	>50,000hrs
Driver option	ON/OFF, Trailing-edge, 1-10v, DALI

### Mounting



Recess




# ORKI 5 Series

Recess Anti Glare LED Downlight



## Dimensions

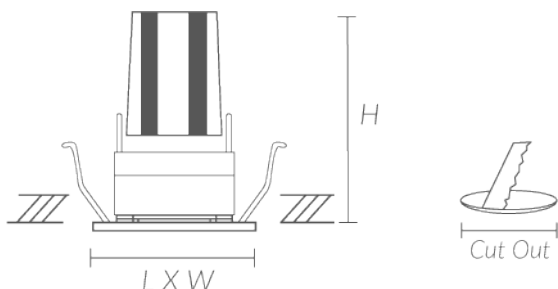

Model	Nominal Power (W)	LED Lumen (lm)	Colour Temp. (K)	Beam Angle (°)	Dimension L x W x H (mm)	Cut Out (mm)
OK5S634	34	4880/5025/5075	3000/4000/5700	15/24/36/60	144x144x171	125x125
OK5S641	41	5485/5645/5700	3000/4000/5700	15/24/36/60	144x144x171	125x125
OK5S746	46	6030/6210/6270	3000/4000/5700	15/24/36/60	169x169x191	150x150
OK5S753	53	7120/7335/7405	3000/4000/5700	15/24/36/60	169x169x191	150x150
OK5S760	60	7930/8165/8245	3000/4000/5700	15/24/36/60	169x169x191	150x150

Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.



All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as guarantee of individual product performance.

[www.davislighting.com](http://www.davislighting.com)

Opti Pro Sdn Bhd <sup>(1455077-V)</sup>

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,  
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ [optipro.sdn.bhd@gmail.com](mailto:optipro.sdn.bhd@gmail.com) ☎ +60-11-8888 3045

# ORKI 5 Series

## Recess Anti Glare LED Downlight



### Features

Eco-friendly LED product for energy saving and visual consistency.  
Modular design for easy maintenance with future proofing.  
Propriety lens design for high LOR.  
Reliable thermal management for long life and lumen maintenance.

### Applications

Recess Anti Glare LED Downlight is designed to use for commercial buildings, shopping malls, residential and etc.

### Standards


EN55015	Radio disturbance emissions
EN61000-3-2	Limited for harmonic emissions
EN61347-1-2-13	LED Modules for general & safety
EN61547	Immunity requirements
EN62471	Photobiological safety of lamps and systems



### Specification

Housing	Die-cast aluminium, white frame, adjustable angle 30°, rotational 355°, stainless steel clips
Light distribution	Narrow, medium beams
Optics	PMMA Lens
Reflector	Silver, Dark Chrome, Black, White
Input Voltage	220-240Vac
Frequency	50/60Hz
Power factor	>0.9
Typ. CRI (Ra)	>80, >90(optional)
SDCM	≤3 step MacAdam
IP Rating	IP20
Rated Life Span	>50,000hrs
Driver option	ON/OFF, Trailing-edge, 1-10v, DALI

### Mounting



Recess




# ORKI 5 Series

Recess Anti Glare LED Downlight



## Dimensions

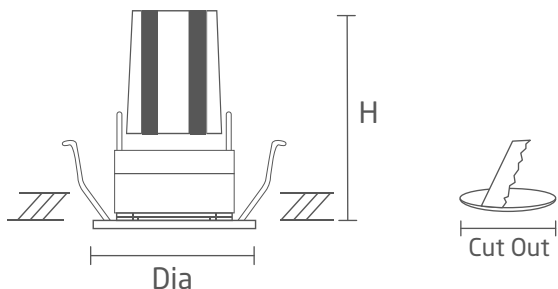

Model	Nominal Power (W)	LED Lumen (lm)	Colour Temp. (K)	Beam Angle (°)	Dimension Dia x H (mm)	Cut Out (mm)
OK5RTL634	34	4880/5025/5075	3000/4000/5700	15/24/36/60	148x155	125
OK5RTL641	41	5485/5645/5700	3000/4000/5700	15/24/36/60	148x155	125
OK5RTL746	46	6030/6210/6270	3000/4000/5700	15/24/36/60	176x175	150
OK5RTL753	53	7120/7335/7405	3000/4000/5700	15/24/36/60	176x175	150
OK5RTL760	60	7930/8165/8245	3000/4000/5700	15/24/36/60	176x175	150

Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.



All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as guarantee of individual product performance.

[www.davislighting.com](http://www.davislighting.com)

**Opti Pro Sdn Bhd** (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,  
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ [optipro.sdn.bhd@gmail.com](mailto:optipro.sdn.bhd@gmail.com) ☎ +60-11-8888 3045