Beatrix BT

Commercial Lighting / Batten

Features

Slim, solid and light weight body
Metal end caps for absolute batten rigidity
Quick installation and easy to fit any space
Fixing holes for easy mounting (ceiling/wall & suspended)
Add on wide / angle reflector (metal or aluminium as option)



Applications

T8 LED Bare batten is designed for general purpose applications and to use for commercial building, car parks, hospitals, classroom, stores, residentials and etc

Standards

MS IEC 60598-2-1:1997
MS IEC 60598-1:2012
EN IEC 55015:2019
EN IEC 61000-3-2:2019
IEC 62776:2014
IES LM-80-2015

Specification

Housing	Heavy gauge sheet steel body with fully welded end cap
Finishing	White epoxy powder coating & oven-baked
Lamp Holder	Polycarbonate housing with copper plate contact
Wire	Heat resistance 105°C (Sirim approved type)
Light Source	T8 LED Lamp
Connector	VDE, UL safety approved material
Voltage	220-240Vac
Frequency	50/60Hz
IP Rating	IP20
Rated Life Span (hrs)	>50,000

Mounting



Surface mounted




Suspension


IP20 INDOOR

Beatrix BT

Commercial Lighting / Batten


Dimensions

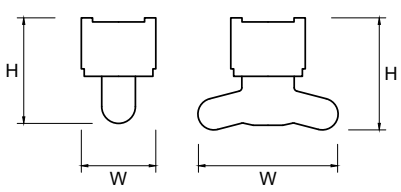

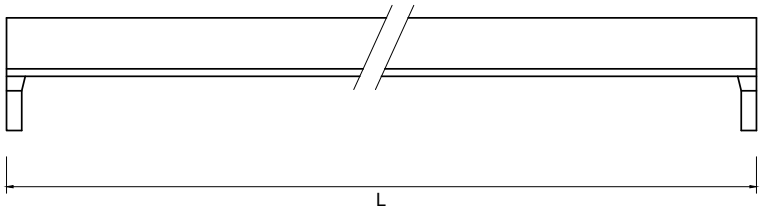


Model	Type	Width (mm)	Height (mm)	Length (mm)	Casing thickness (mm)	Mounting
BT21T8A	Single tube	44	64	610	<0.4	surface/ceiling/ suspended
BT22T8A	Double tube	105	71	610	<0.4	surface/ceiling/ suspended
BT41T8A	Single tube	44	64	1220	<0.4	surface/ceiling/ suspended
BT42T8A	Double tube	105	71	1220	<0.4	surface/ceiling/ suspended

Installation

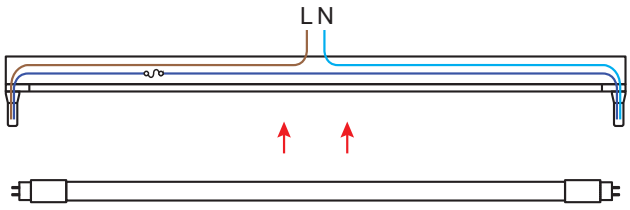

Type A LED lamp

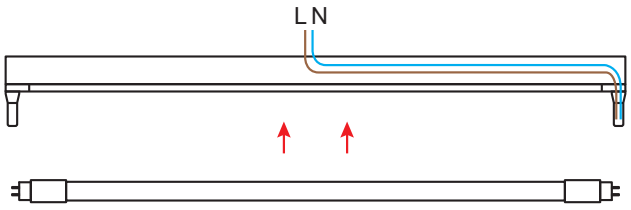

Type B LED lamp

All photometric and electrical data published are of ±10% tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Opti Pro Sdn Bhd (1455077-V)
No 16, Jalan Putra Mahkota 7/8D, Putra Heights,
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia
optipro.sdn.bhd@gmail.com +60-11-8888 3045