

Armstrong ARS

Interior Lighting / Semi Low Bright Troffer



Features

- Slim, solid and light weight body
- Hinged louvred for easy maintenance
- Quick installation
- Fixing holes and bracket for easy mounting

Applications

T8 LED surface semi low bright louvre is designed to be use for commercial building, hospitals, offices, classrooms, retails and etc

Standards

- MS IEC 60598-2-1:1997
- MS IEC 60598-1:2012
- EN IEC 55015:2019
- EN IEC 61000-3-2:2019
- IEC 62776:2014
- IES LM-80-2015



Specification

Housing	Heavy gauge sheet steel body with anodized aluminium reflector
Finishing	White epoxy powder coating & oven-baked
Lamp Holder	Polycarbonate housing with copper plate contact
Wire	Heat resistance 105°C (Sirim approved type)
Light Source	T8 LED Lamp
Connector	VDE, UL safety approved material
Voltage	220-240Vac
Frequency	50/60Hz
IP Rating	IP20
Rated Life Span (hrs)	>50,000

Mounting



Surface mounted





Armstrong ARS

Interior Lighting / Semi Low Bright Troffer




Dimensions

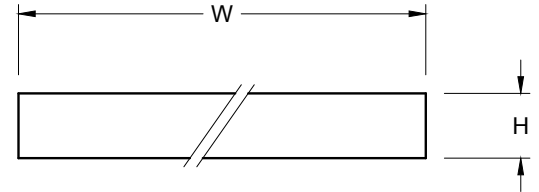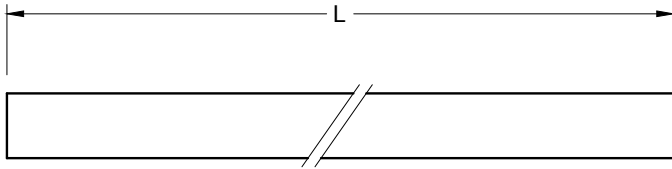


Model	Type	Width (mm)	Length (mm)	Height (mm)	Mounting
ARS21T8A	Single tube	300	615	90	Surface
ARSW22T8A	Double tube	605	615	90	Surface
ARSW23T8A	Triple tube	605	615	90	Surface
ARS42T8A	Double tube	300	1225	90	Surface
ARSW42T8A	Double tube	605	1225	90	Surface
ARSW43T8A	Triple tube	605	1225	90	Surface

Installation

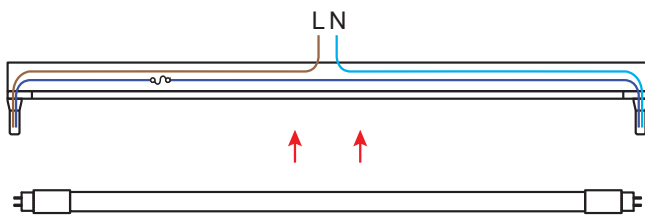

Type A LED lamp

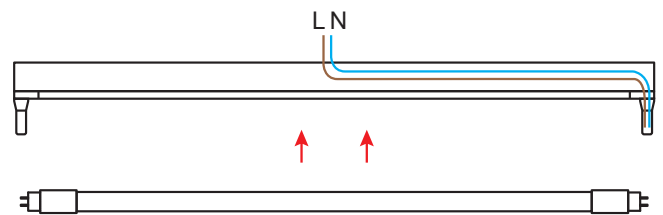

Type B LED lamp



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

www.davislighting.com

Opti Pro Sdn Bhd (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ optipro.sdn.bhd@gmail.com ☎ +60-11-8888 3045