

Broadlume BLT (IP54)

Interior Lighting / Diffused Troffer (gasketed)



Features

Slim, solid and light weight body
Hinged diffuser for easy maintenance
Quick installation
Fixing holes and bracket for easy mounting

Applications

T8 LED recessed diffused luminaire is designed to be used for commercial building, hospitals, offices, classrooms, retails and etc

Standards


MS IEC 60598-2-2:1998
MS IEC 60598-1:2012
EN IEC 55015:2019
EN IEC 61000-3-2:2019
IEC 62776:2014
IES LM-80-2015



Specification

Housing	Heavy gauge sheet steel body with acrylic prismatic diffuser (option available*)
Finishing	White epoxy powder coating & oven-baked
Lamp Holder	Polycarbonate housing with copper plate contact
Wire	Heat resistance 105°C (Sirim approved type)
Light Source	T8 LED Lamp
Connector	VDE, UL safety approved material
Voltage	220-240Vac
Frequency	50/60Hz
IP Rating	IP54
Rated Life Span (hrs)	>50,000

Mounting

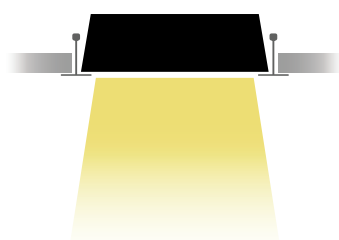

Recessed T-bar





Broadlume BLT (IP54)

Interior Lighting / Diffused Troffer (gasketted)




Dimensions

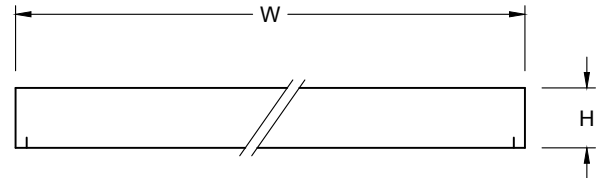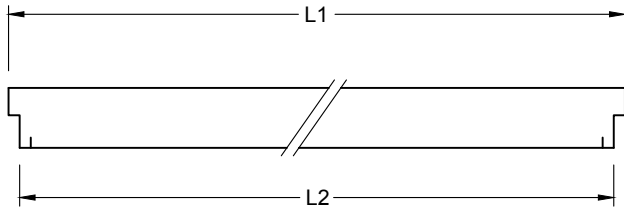


Model	Type	Width (mm)	Length (L1) (mm)	Length (L2) (mm)	Height (H) (mm)	Mounting
BLTW22T8A (IP54)	Double tube	603	611	598	80/120	Recessed T-bar
BLTW23T8A (IP54)	Triple tube	603	611	598	80/120	Recessed T-bar
BLT42T8A (IP54)	Double tube	298	1221	1208	80/120	Recessed T-bar
BLTW42T8A (IP54)	Double tube	603	1221	1208	80/120	Recessed T-bar
BLTW43T8A (IP54)	Triple tube	603	1221	1208	80/120	Recessed T-bar

Installation

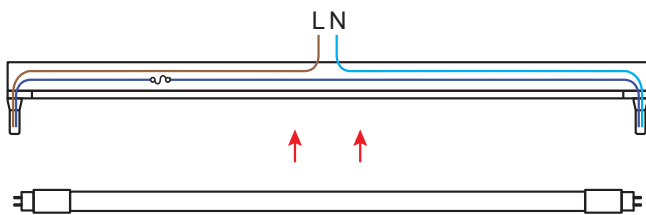

Type A LED lamp

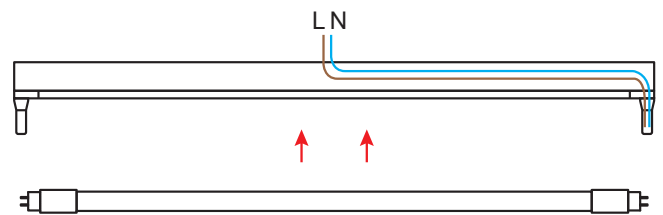

Type B LED lamp



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

www.davislighting.com

Opti Pro Sdn Bhd (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ optipro.sdn.bhd@gmail.com ☎ +60-11-8888 3045