

SWAZI Series

Interior Lighting / Recessed Anti Glare Downlight



Features

Eco-friendly LED product for energy saving
Modular design for easy maintenance with future proofing
Reliable thermal management for long life and lumen maintenance.

Applications

Recessed Anti Glare LED Downlight is designed to use for commercial building, malls, residential and etc.

Standards


EN55015	Radio disturbance emissions
EN61000-3-2	Limited for harmonic emissions
EN61347-1-2-13	LED Modules for general & safety
EN61547	Immunity requirements
EN62471	Photobiological safety of lamps and systems

Specification

Housing	Die-cast aluminium, white trim, Adjustable angle 30°, rotation 355°, stainless steel clips
Optics	Light distribution: narrow, medium beams, PMMA lens
Reflector	Dark reflector (DR), silver (SR), optional black
Input Voltage	220-240Vac
Frequency	50/60Hz
Power factor	>0.9
Typ. CRI (Ra)	>90
SDCM	≤3 step MacAdam
IP Rating	IP20
Rated Life Span	>50,000hrs
Driver option	ON/OFF, Trailing-edge, 1-10v, DALI



Mounting

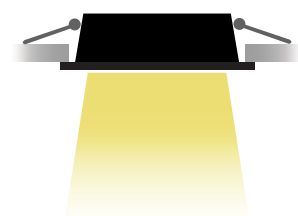

Recessed




SWAZI Series

Interior Lighting / Recessed Anti Glare Downlight



Dimensions

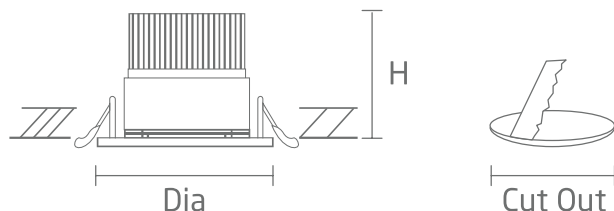

Model	Nominal Power (W)	LED Lumen (lm)	Colour Temp. (K)	Beam Angle (°)	Dimension DiaxH (mm)	Cut Out (mm)
SWZ205	5	450	3000/4000/6000	15/24/38	63x75	55
SWZ308	8	720	3000/4000/6000	15/24/38	87x92	75
SWZ312	12	900	3000/4000/6000	15/24/38	87x92	75
SWZ315	15	1350	3000/4000/6000	15/24/38	87x92	75
SWZ420	20	1800	3000/4000/6000	15/24/38	105x106	95
SWZ425	25	2250	3000/4000/6000	15/24/38	105x106	95

Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or similar qualified person.



All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

www.davislighting.com

Opti Pro Sdn Bhd (1455077-V)

No 16, Jalan Putra Mahkota 7/8D, Putra Heights,
47650 Subang Jaya, Selangor Darul Ehsan, Malaysia

✉ optipro.sdn.bhd@gmail.com ☎ +60-11-8888 3045