Installation Instruction

DAVIS LIGHTING
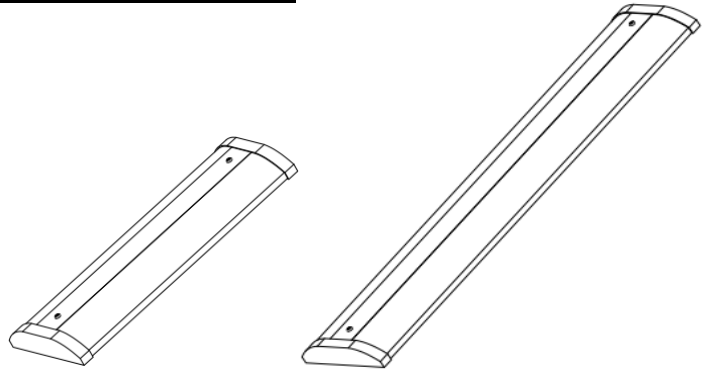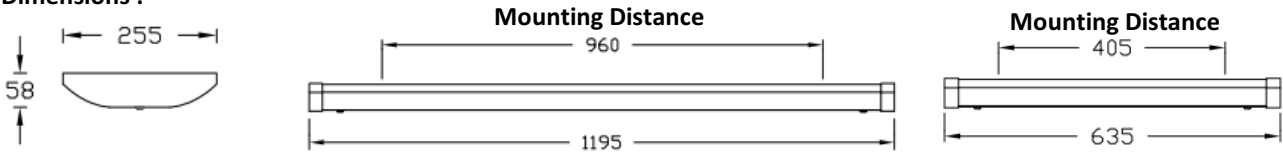
MODEL : NUS40
NUS20

- **Read all instructions to prevent injury, electric shock or damage due to fire or mechanical hazards.**
- **See product label for supply specifications.**
- **Suitable for direct mounting on flammable surfaces.**

🚫 **DIY**
MUST BE INSTALLED BY A LICENSED ELECTRICIAN

STORAGE :
Prior to installation products are to be stored in cool and dry conditions.

Dimensions :

255 | 58 | **Mounting Distance** 960 | 1195 | **Mounting Distance** 405 | 635

Cautions :
- Installation is to be completed by an competent licenced electrician, in accordance with these instructions and relevant local regulations.
- Electronic control equipment must not be subjected to high voltages, DO NOT MEGGER between Live and Neutral.
- All cable/conduit terminations must be installed in accordance with the designated IP rating of this product.
- Suitable installation fastening methods should be employed to ensure the mounting points are not damaged when subjected to vibration and or movement.

Installation :
Open the gear cover and install the fitting direct to the ceiling through four mounting holes provided.

1) Loosen both gear cover screws

2) Lift up by sliding the gear tray cover

4x mounting holes on both ends

Mains Connections :

Bring in the mains supply cables through cable entry hole and connect them to the terminal block located in the gear compartment.

WARNING : This product must be earthed.

L Earth N
Live   Earth   Neutral

Ta=42°C
INDOOR USE
IP20
SELV

LA-P1154-00