



Features

- Circular profile
- Surface mount
- Eco-friendly LED product for energy saving
- CRI ≥ 80 and good stability over lifetime
- Quick and easy installation

Applications

- Offices
- Hotels
- Retail shops
- Residential

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

Mounting Methods



Surface mounted






Specifications

Model	DM505WxK	DM710WxK	DM915WxK	DM920WxK
Nominal Power (W)	6	10	15	20
Input Voltage	220 - 240 VAC 50 / 60 Hz			
Luminous Flux (lm)	460	900	1330	1640
Efficacy (lm/W)	77	90	89	82
CRI	≥ 80			
Power Factor	> 0.90			
Colour Temp. (K)	3000 / 4000 / 5700K			
Beam Angle (°)	110			
LED Life L70B50 (hr)	> 30,000			
Ambient Temp. t_a (°C)	35			
Weight (kg)	0.10	0.20	0.30	0.30


"x" denotes CCT, 3 = 3000K ; 4 = 4000K ; 6 = 5700K

Lighting Data



DM710W4K

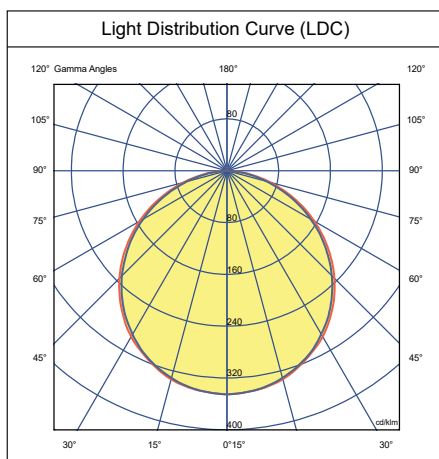



DM920W4K

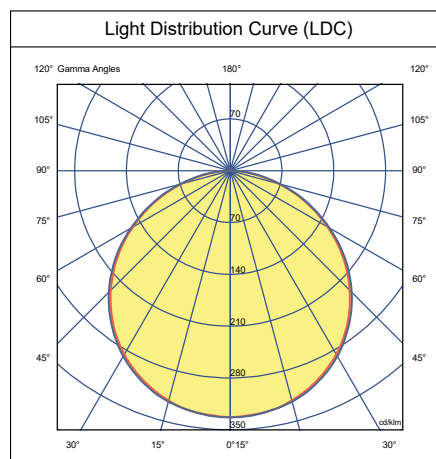



Dimensions



DM505WxK



DM710WxK



DM915WxK
DM920WxK

