



Features

- UV stabilized polycarbonate body
- UV stabilized impact resistant PC opal diffuser
- Vandal resistant
- Insect proof
- One piece moulded expanded polyurethane gasket
- Direct surface mounting
- White powdercoated metal gear tray



Applications

- Garages, carports
- Tool sheds
- Boat sheds
- Pergolas
- Salt air environment

Options

- Fused terminal blocks
- CCT: 3000K, 6500K

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

Mounting Methods



Surface mounted


Specifications

Model	TLO210RBLxK	TLO220RBLxK
Nominal Power (W)	10	20
Input Voltage	220 - 240 VAC 50 / 60 Hz	
Luminous Flux (lm)	560	1050
Efficacy (lm/W)	56	53
CRI	> 80	
Power Factor	> 0.90	
Colour Temp. (K)	3000 / 4000 / 6500	
Rated Life L70B50 (hr)	50,000	
Ambient Temp. t_a (°C)	35	
Weight (kg)	1.26	


"x" denotes CCT, 3 = 3000K ; 4 = 4000K ; 6 = 6500K
 Specifications shown for 4000K

Lighting Data

TLO210RBL4K

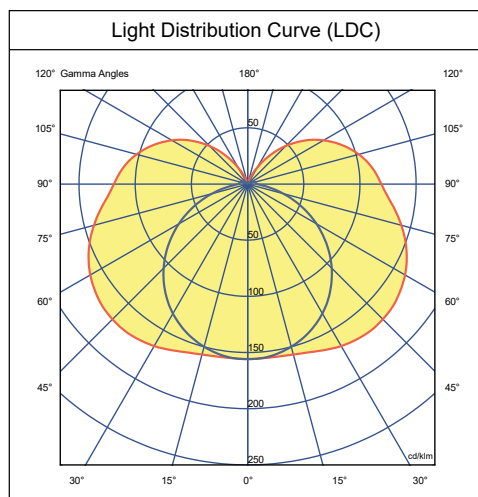

TLO220RBL4K

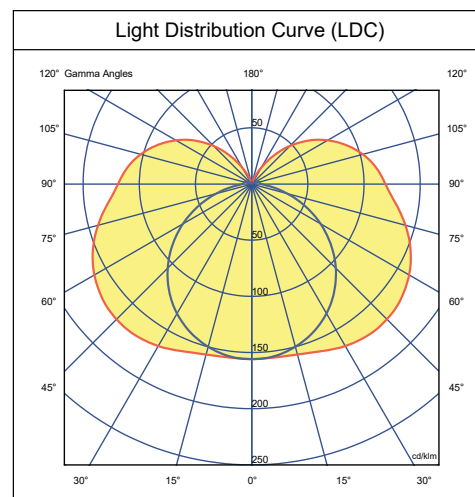

Dimensions

