

VARROS ROUND TRIM WALL WASHER V2

Interior Lighting / Downlight



DAVISLIGHTING

Features

- Comprehensive range of downlight
- Round trim wall washer recessed luminaire
- Low glare & comfortable lighting
- Low maintenance
- Energy efficient
- Easy and secure installation

Applications

- Hotels
- Offices
- Schools
- Showrooms
- Museums

Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.2
- IEC/AS/NZS CISPR 15

Mounting Methods





Recessed




Specifications

Model	VRWD305-xyz	VRWD308-xyz	VRWD313-xyz
Cut Out (mm)	Ø75		
Nominal Power (W)	5	8	13
Frequency (Hz)	50/60		
Luminaire Flux (lm)	289	354	535
Luminaire Efficacy (lm/W)	58	58	48
CRI (Ra)	>90		
Power Factor	>0.90		
SDCM	<3		
CCT (K)	2700/3000/4000		
Beam Angle (°)	45		
Luminaire Rated Life (hr)	>50000		
UGR Rating			
Ambient Temp. ta (°C)	25		
Operating Temp. (°C)	-20 to +50		
Weight (kg)	0.27		
IP Rating	IP20/IP44		

Lighting Data


VRWD305				VRWD308			
	H(m)	E(lx)	D(m)		H(m)	E(lx)	D(m)
			45°				45°
	1	249.7	1.05		1	290.8	1.01
	2	62.43	2.10		2	72.70	2.02
	3	27.75	3.15		3	32.31	3.03
	4	15.61	4.21		4	18.18	4.05
	5	9.989	5.26		5	11.63	5.06

VRWD313

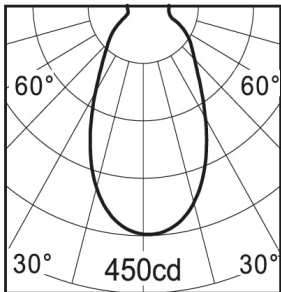

H(m)	E(lx)	D(m)
		45°
1	395.4	1.14
2	98.85	2.28
3	43.93	3.43
4	24.71	4.57
5	15.82	5.71

Dimensions

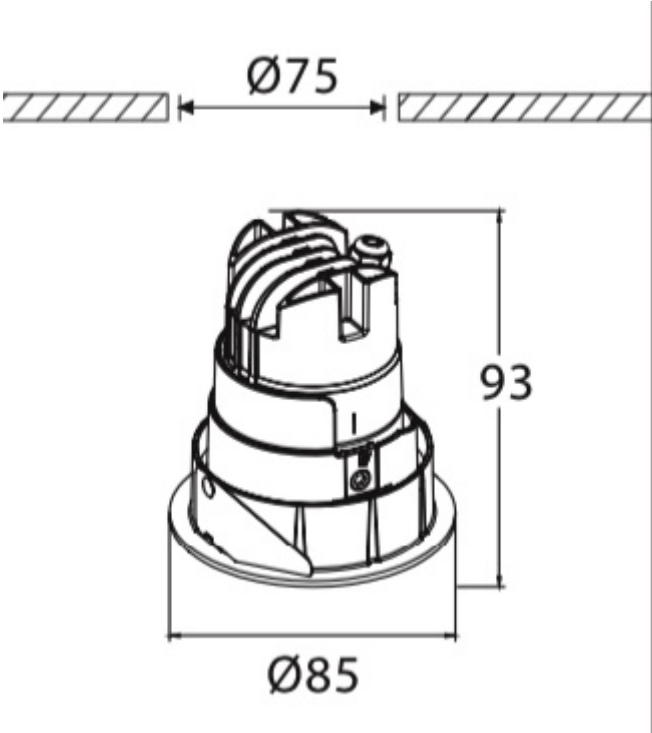

All photometric and electrical data published are of ±10% tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.