

# WYPLASH WPUT

Exterior Lighting / Weatherproof



## Features

Wide body IP65 rated Weatherproof Batten  
Robust IK08 rated polycarbonate body and opal diffuser  
Easy release stainless steel clip system  
Available in 2ft and 4ft  
50,000hrs (@L70) rated system  
SELV compliant  
Suitable for surface or pendant mount  
Flicker-free operation

## Applications

Outdoor  
Industrial  
Car parks  
Corridors and Stairwells  
Public Amenities  
Factories & warehouses


## Options

Dali Dimming  
Sensor with corridor function  
Emergency

## Standards

Manufactured under ISO 9001:2015 to standards  
IEC/AS/NZS 60598.1  
IEC/AS/NZS 60598.2.1  
IEC/AS/NZS CISPR 15

## Mounting Methods

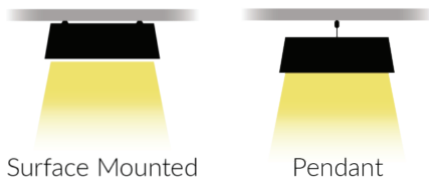

Surface Mounted

Pendant



**SELV**

# WYPLASH WPUT

Exterior Lighting / Weatherproof



DAVISLIGHTING

## Specifications

Model	WPUT220-R85	WPUT420-R85	WPUT435-R85
Body Colour	Grey		
Nominal Power (W)	18	18	35
Input Voltage (V)	220-240		
Frequency (Hz)	50/60		
Luminaire Flux (lm)	2160	2160	4200
Luminaire Efficacy (lm/W)	120		
CRI (Ra)	>80		
Power Factor	>0.9		
CCT (K)	5000		
Beam Angle (°)	120		
Luminaire Rated Life (hr)	>50000 @ L70		
Operating Temp. (°C)	-20 to 35		
Weight (kg)	1.2	1.2	2.2

## Product Code Key

Model	Nominal Length	Power (min-max)	CRI & Colour Temp.	- Dimming	Emergency	Sensor	Emergency & Sensor
WPUT	2 = 600mm 4 = 1200mm	20 = 18W 35 = 35W	R85 = CRI>80, 5000K R84 = CRI>80, 4000K	D14 = Dali	E01 = Maintained with 3hours Emergency + LiFePO4 + test switch	S25 = Microwave sensor Motion, Daylight, Dimming, ON/OFF	E1S25 = Maintained + Microwave sensor  Motion, Daylight, Dimming, ON/OFF

e.g. WPUT 600mm long, 20w, CRI>80, CCT5000K, Maintained emergency + sensor

Refer to accessories section for sensor remote

### Default Sensor Setting

Detection range : 6M  
Hold time : 3 minutes  
Standby period : 0  
Standby dim level 30%  
Daylight : OFF

\*Sensor setting set using remote to enable easy configuration/reconfiguration of sensor setting.

# WYPLASH WPUT


Exterior Lighting / Weatherproof




DAVISLIGHTING

## Lighting Data

WPUT220-R85

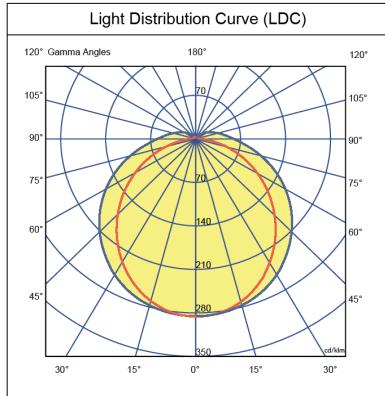


WPUT435-R85

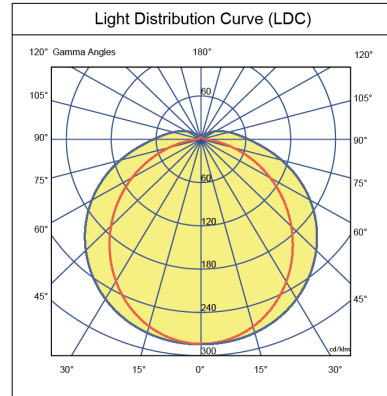


## Dimensions

WPUT220



WPUT420 / WPUT435




## Accessories

A remote control is required to configure/reconfigure WPUT sensor setting.


One remote control is required per project.

Each remote can program multiple sensors.

Two IR-based handheld remote control models are available.



SW-R0208-00  
(basic function)

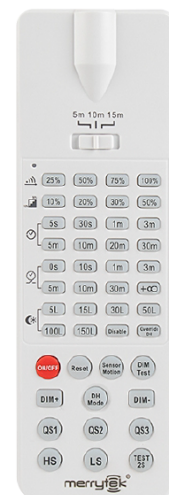

SW-R0210-00  
(advance functions)



All photometric and electrical data published are of  $\pm 10\%$  tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.