



Features

Extruded aluminium body, die-cast aluminium top
UV resistant black powdercoat
Stainless steel hardware
Silicon gasket
4mm toughened glass diffuser
Integrated control gear
IP65 rating

Applications

Pathways
Gardens, parks
Hotels, motels
Apartment complexes
Landscaping projects

Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS CISPR 15





Model No. Reference


Model	Profile	Reflector	Power	CCT	Colour	Dim's
BL	D = Dome top	F = Flat conical	12W = 12 W	3K = 3000K	03 = Black	15 = Ø150mm
	F = Flat top	L = Louvre	15W = 15 W	4K = 4000K	06 = Grey	
			20W = 20 W	5K = 5000K		
BLPOST	---	---	---	---		400 = 400mm 800 = 800mm

E.g. BLFL15W4K0315 + BLPOST400 = Flat top louvred reflector 15W 4000K black Ø150mm 645 high

Specifications

Model	Power	Lumen Output	Efficacy	CRI	LED Life
BLxx12W4K	12 W	395 lm	33 lm/W		
BLxx15W4K	15 W	493 lm	33 lm/W	>80	30,000 hr @ L70
BLxx20W4K	20 W	899 lm	45 lm/W		

Dimensions

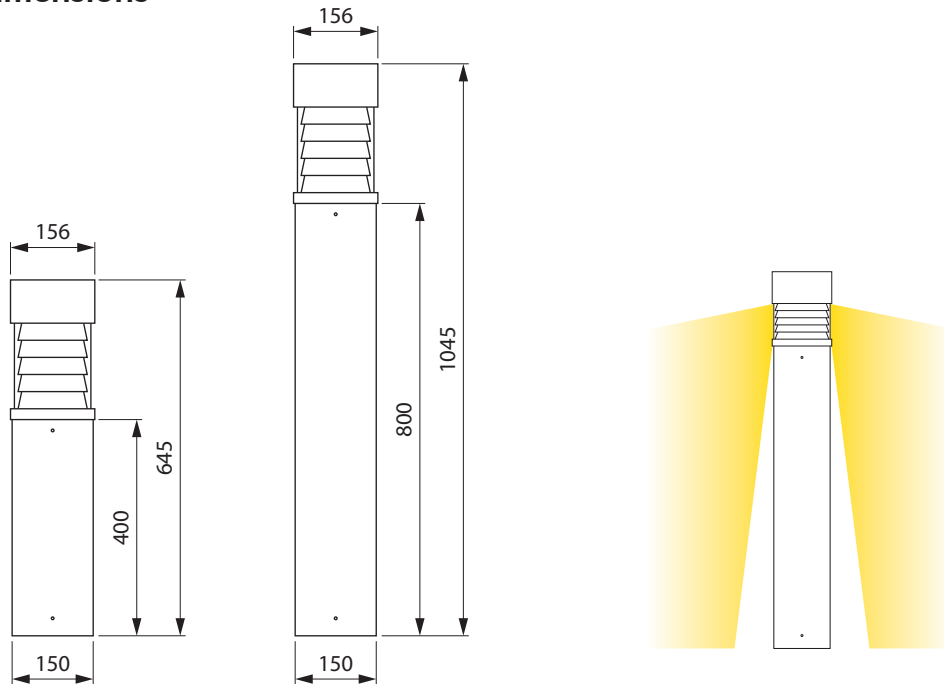

BLFL12/15/20
+
BLPOST400

BLFL12/15/20
+
BLPOST800

