



### Features

- Triac dimmable
- CCT selectable: 3000K, 4000K, 5000K
- Polyamide body with latest heat dissipation technology
- Opal acrylic diffuser for even lighting output
- High efficiency SMD LED chips
- CRI ≥80 and good stability over lifetime
- With flex and plug
- Quick and simple installation, use spring clip to fix on ceiling
- IC-4 compliant
- IP44 below ceiling, IP40 above
- Black trim accessory available (for DA910CTD-T02 only)
- 3-year warranty


### Applications

- Commercial building
- Boutiques
- Restaurants
- Bedrooms
- Offices / meeting rooms

### Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS 60598.2.2
- IEC/AS/NZS CISPR 15

### Mounting Methods



Recessed



Selectable CCT with DIP switch



Black Trim (Accessory)




### Specifications

Model	DA705CTD	DA910CTD / DA910CTD-T02
Nominal Power (W)	6	9
Input Voltage	220 - 240 VAC 50 / 60 Hz	
Luminaire Flux (lm)	610	885
Luminaire Efficacy (lm/W)	100	95
CRI	≥ 80	
Power Factor	> 0.90	
SDCM	≤ 5	
CCT Switchable (K)	3000 + 4000 + 5000	
Beam Angle (°)	90	
Luminaire Rated Life (hrs)	30,000	
Operating Temp. (°C)	-20 to +35 *	
Weight (kg)	0.20	


Specifications shown for 4000K  
 \*Not suitable for installation in freezer room  
 T02 = Trim (black)

### Lighting Data


DA705CTD (4000K)

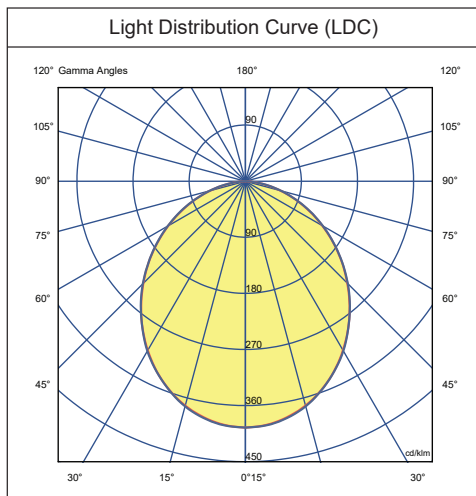

DA910CTD (4000K)

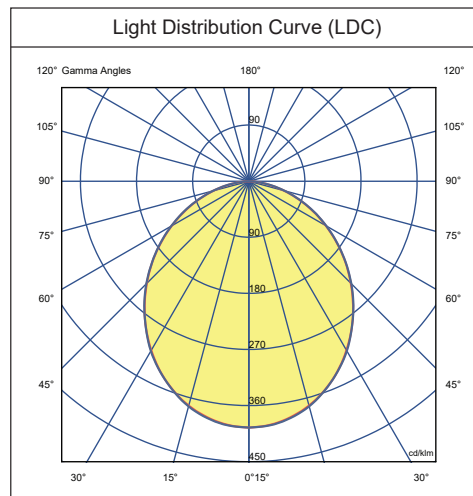


### Dimensions



cut-out Ø70

DA705CTD



cut-out Ø90

DA910CTD

