

# Dalco Flush

Interior Lighting / Downlight



DAVIS LIGHTING

## Features

- Flush finish recessed downlight
- Triac dimmable
- CCT selectable: 3000K, 4000K, 5000K
- Polyamide body with latest heat dissipation technology
- Opal acrylic diffuser for even lighting output
- High efficiency SMD LED chips
- CRI ≥80 and good stability over lifetime
- With flex and plug
- Quick and simple installation, use spring clip to fix on ceiling
- IC-4 compliant
- IP44 below ceiling, IP40 above
- 3-year warranty




## Applications

- Commercial building
- Boutiques
- Restaurants
- Bedrooms
- Offices / meeting rooms

## Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS 60598.2.2
- IEC/AS/NZS CISPR 15

## Mounting Methods



Recessed

Selectable CCT with DIP switch



# Dalco Flush

Interior Lighting / Downlight




DAVIS LIGHTING

## Specifications


Model	DAS910CTD		
Nominal Power (W)	9		
Input Voltage	220 - 240 VAC 50 / 60 Hz		
CCT Switchable (K)	3000	4000	5000
Luminaire Flux (lm)	794	936	830
Luminaire Efficacy (lm/W)	97	104	103
CRI	≥ 80		
Power Factor	> 0.90		
SDCM	≤ 5		
Beam Angle (°)	90		
Luminaire Rated Life (hrs)	30,000		
Operating Temp. (°C)	-20 to +35 *		
Weight (kg)	0.20		

\*Not suitable for installation in freezer room

## Lighting Data

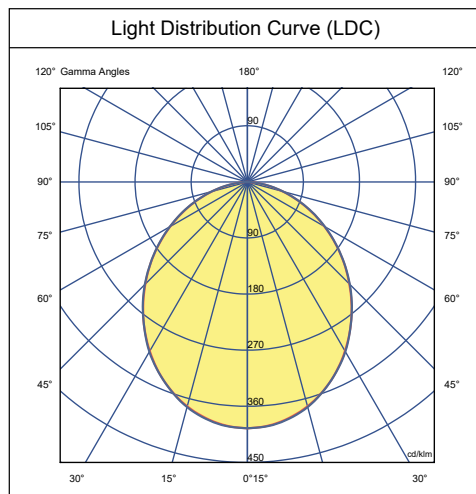

## Dimensions



cut-out Ø90



davislighting.com



davislighting.com.au

All photometric and electrical data published are of ±10% tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Dalco Flush 211006